

PART LIST		
ITEM	QTY	DESCRIPTION
(1)	1	TRIJICON RMR PLATE PN 01-075
(2)	2	#8-40 x .278" SCREW
(3)	2	#6-32 x .5" SCREW

This document fits an 8.5 x 11 US Letter sheet.
 Document location: <https://koeng.co/instructions/>
 Document location URL QR code: 

* Or other sights with compatible mount footprint.
 ** Purchased separately.

Tools Needed

- Torque driver / wrench (e.g., 5 - 25 in-lbs).
- T15 Torx bit for installing the adapter plate and RMR sight.

1. Install Adapter Plate

- Affix adapter plate (1) to Nightforce RAP-i / X-treme Duty MultiMount ring using screws (2). + Torque to 25 in-lbs.

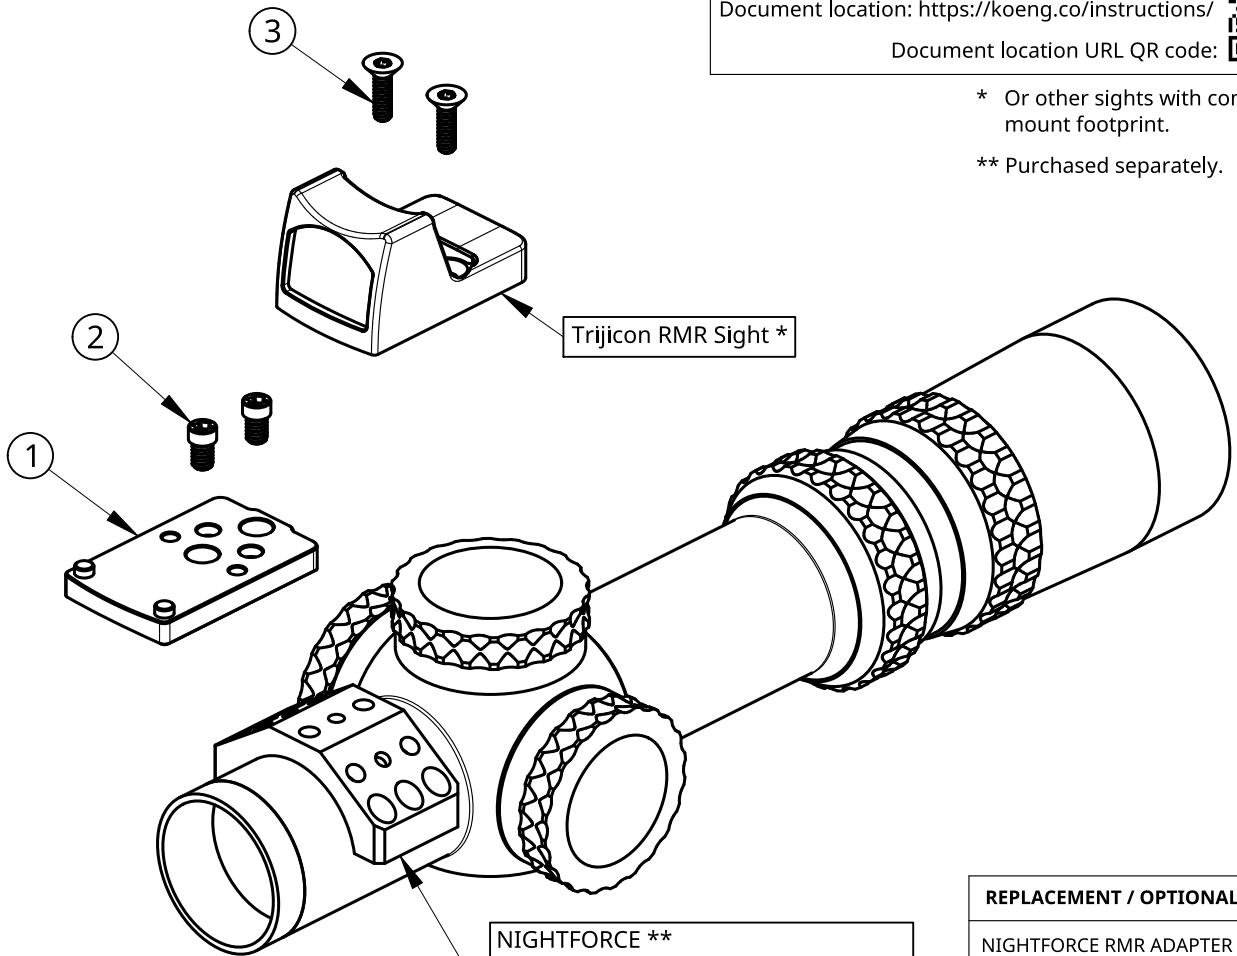
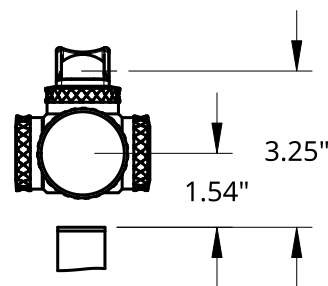
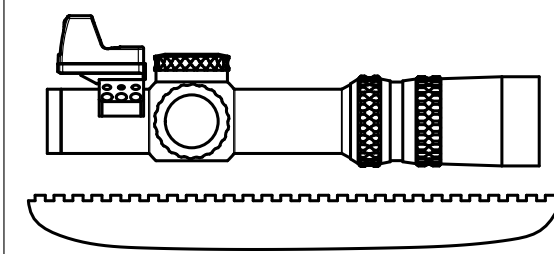
2. Install Trijicon RMR Sight

- Use the locating tabs on the adapter to determine the correct orientation and make sure the sight is fully seated. +
- Install the two mount screws (3) supplied with the adapter. Torque to 15 in-lbs.
- After initial firing, retighten the two mount screws to ensure the sight is securely fastened.

+ Both the RMR locating tabs and MultiMount interface are machined to have a tight fit to help alleviate impact force from the mount screws and to enhance zero retention.



AR15 / M4 HEIGHT OVER BORES

w/ 1.54" SCOPE MOUNT
 ATACR 1-8X: 2.74"
 RMR: 4.45"



NIGHTFORCE **
 RAP-i / X-treme Duty MultiMount Ring
 - A425 (30MM MultiMount)
 - A426 (34MM MultiMount)
 - A687 / A689 (30MM RAP-i)
 - A686 / A688 (34MM RAP-i)

REPLACEMENT / OPTIONAL PARTS	
NIGHTFORCE RMR ADAPTER PN 01-075	
ADAPTER MOUNT SCREWS PN 10-009	
RMR MOUNT SCREWS PN 10-012	

NAME		DATE		KOENG 			
DRAWN		2024/08/30					
CHECKED				TITLE TRIJICON RMR Nightforce Adapter PN 01-075			
APPROVED							
MATERIAL		FINISH		SIZE	DWG. NO.	REV.	
7075-T6		MIL-SPEC TYPE 3 BLACK HARDCOAT		A	20240830	A	
SCALE		WEIGHT		SHEET			
1:1.5		0.74oz / 21g		1 of 1			