

PARTS LIST

ITEM	QTY	DESCRIPTION
(1)	1	AIMPOINT ACRO PLATE PN 01-009 REV02
(2)	2	#8-40, .28 SCREW REUSE ONES INCLUDED WITH YOUR MULTIMOUNT / RAP-I KIT **


This document fits an 8.5 x 11 US Letter sheet.
Document directory: <https://koeng.co/instructions/>

Document directory URL QR code:



* Or other compatible sights with same mounting interface.

** Purchased separately.

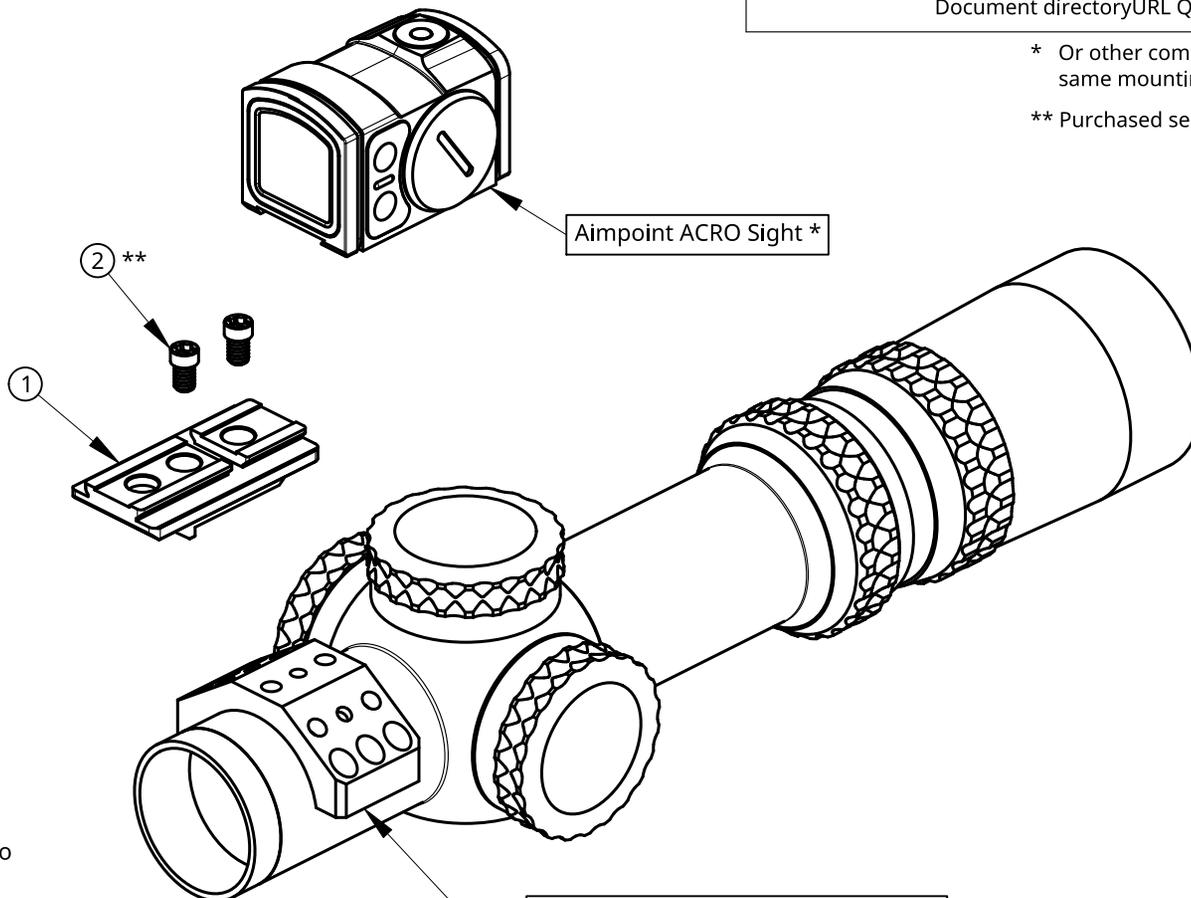

Tools Needed

- Torque driver / wrench (e.g., 10 - 50 in-lbs).
- T10 Torx bit for installing Aimpoint ACRO.
- T15 Torx bit for installing the adapter plate.

1. Install Adapter Plate

- Affix adapter plate (1) to Nightforce RAP-i / X-treme Duty MultiMount top ring using screws (2). + Torque to 25 in-lbs.



2. Install Aimpoint ACRO Sight

- With the ACRO recoil stop positioned in the recess, push the sight forward and tighten the locking bar screw.
- Tighten the locking bar screw until light resistance is encountered.
Proceed with another 1/4 - 1/2 turn until fully tightened (torque to <=26 in-lbs).
- Retighten the locking bar screw after initial firing to ensure the sight is securely fastened.

+ The adapter's MultiMount interface is machined to have a tight fit to help alleviate impact force from the mount screws and to enhance zero retention.

AR15 / M4 HEIGHT OVER BORES

w/ 1.54" SCOPE MOUNT
ATACR 1-8X: 2.74"
ACRO: 4.45"

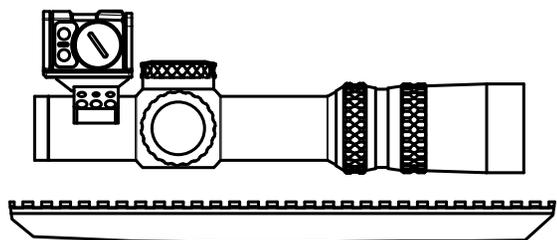

NIGHTFORCE **
RAP-i / X-treme Duty MultiMount Ring
- A425 (30mm MultiMount)
- A426 (34mm MultiMount)
- A687 / A689 (RAP-i, 30mm, BLK / DE)
- A686 / A688 (RAP-i, 34mm, BLK / DE)

REPLACEMENT / OPTIONAL PARTS

ACRO NIGHTFORCE ADAPTER
PN 01-009 REV02



ADAPTER MOUNT SCREWS
PN 10-009



NAME	DATE
DRAWN	KOENG.CO 2025/05/01
CHECKED	
APPROVED	
MATERIAL	6061-T6
FINISH	Mil. Spec Type 3 Anodized



KOENG

TITLE			
ACRO Nightforce Adapter PN 01-009 REV02			
SIZE	DWG NO.	REV.	
A	20250501	02	
SCALE	WEIGHT	SHEET	
1:1.5	0.59 oz / 16.7 g	1 of 1	