

PARTS LIST

ITEM	QTY	DESCRIPTION
(1)	1	HOLOSUN HE509T ADAPTER
(2)	2	#10-24 x 1/2 SCREW


This document fits an 8.5 x 11 US Letter sheet.
Document location: <https://koeng.co/instructions/>



Document location URL QR code:

* Or other compatible sights with same mounting interface.

** Purchased separately.



Holosun HE509T Sight *

Tools Needed


- Torque driver / wrench (e.g., 10 - 50 in-lbs)
- T10 Torx bit for torque wrench
- T25 Torx bit for torque wrench

1. Install Adapter Plate

- Affix adapter plate (1) to Badger Ordnance ARC using screws (2). Torque to 35 in-lbs.

2. Install Holosun HE509T Sight

- With the HE509T recoil stop positioned in the recess, push the sight forward and tighten the locking bar screw.
- Tighten the locking bar screw until light resistance is encountered.
Proceed with another 1/4 - 1/2 turn until fully tightened (torque to <=19 in-lbs).
- Retighten the locking bar screw after initial firing to ensure sight is securely fastened.

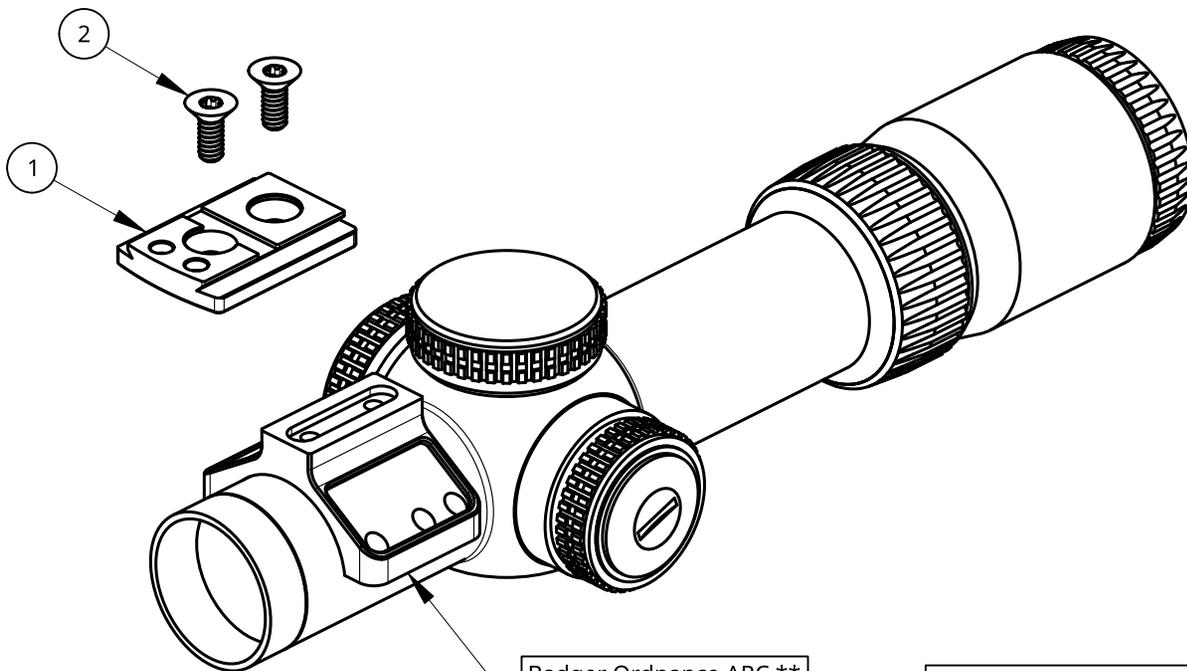


Badger Ordnance ARC **
700-30 (30mm)
700-34 (34mm)
700-35 (35mm)

REPLACEMENT / OPTIONAL PARTS

HE509T C1 ADAPTER
PN 01-012 REV02



C1 ADAPTER SCREW, #10-24
PN 10-004

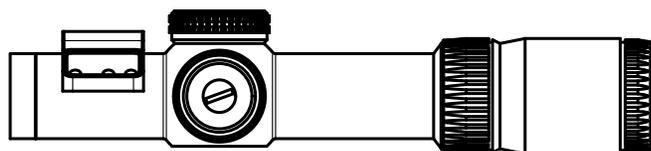

	NAME	DATE
DRAWN	KOENG.CO	08/22/2025
CHECKED		
APPROVED		
MATERIAL	6061-T6	FINISH Mil. Spec Type 3 Anodized

KOENG



TITLE
HE509T C1 ADAPTER
PN 01-012 REV02

SIZE	A	DWG. NO.	20250822	REV.	01
SCALE	1:1.5	WEIGHT	0.56oz / 15.88g	SHEET	1 of 2

2



1

AR15 / M4 HEIGHT OVER BORES (aka SIGHT HEIGHT)

w/ 1.54" SCOPE MOUNT

VORTEX RAZOR G3 1-10X: 2.74"

HOLOSUN HE509T: 4.59"

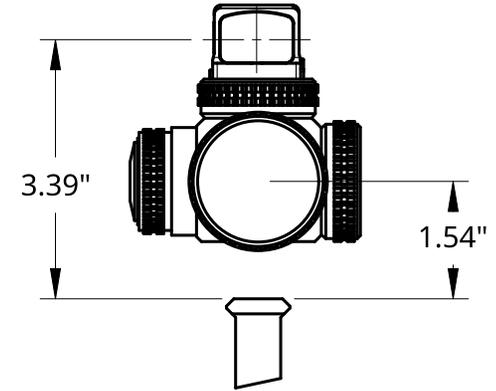
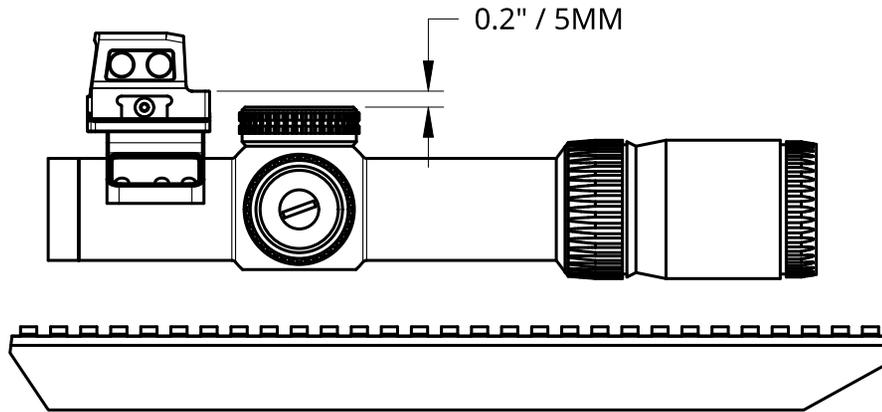


AR15 / M4 HEIGHT OVER BORES (aka SIGHT HEIGHT)

w/ 1.54" SCOPE MOUNT

LEUPOLD MK5 2-10X: 2.74"

HOLOSUN HE509T: 4.84" (w/ BADGER C1 ARC SPACER PN 700-15)

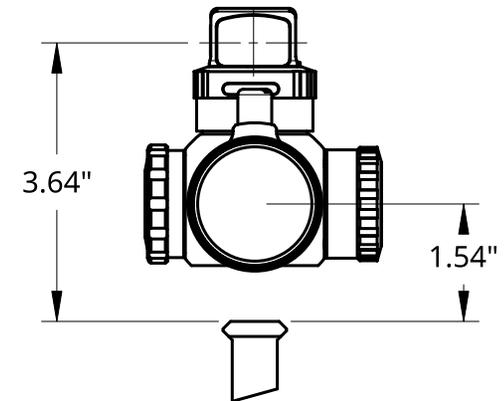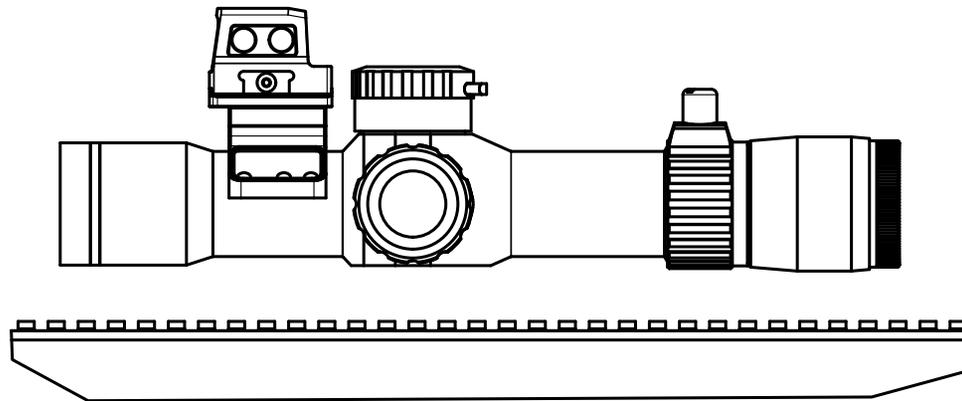

2

1