

2

1

PART LIST		
ITEM	QTY	DESCRIPTION
(1)	1	TRIJICON RMR PLATE PN 01-075 REV02
(2)	2	#6-32 x .5" SCREW
(3)	2	#8-40 x .28" SCREW REUSE ONES INCLUDED WITH YOUR MULTIMOUNT / RAP-I KIT **

This document fits an 8.5 x 11 US Letter sheet.
Document location: <https://koeng.co/instructions/>



Document location URL QR code:

* Or other sights with compatible mount footprint.

** Purchased separately.

B

Tools Needed

- Torque driver / wrench (e.g., 10 - 50 in-lbs).
- T15 Torx bit for installing the adapter plate and RMR sight.


1. Install Adapter Plate

- a. Affix adapter plate (1) to Nightforce RAP-i / X-treme Duty MultiMount ring using screws (2). + Torque to 25 in-lbs.

2. Install Trijicon RMR Sight

- a. Use the locating tabs on the adapter to determine the correct orientation and make sure the sight is fully seated. +
- b. Install the two mount screws (3) supplied with the adapter. Torque to 15 in-lbs.
- c. After initial firing, retighten the two mount screws to ensure the sight is securely fastened.

+ Both the RMR locating tabs and MultiMount interface are machined to have a tight fit to help alleviate impact force from the mount screws and to enhance zero retention.

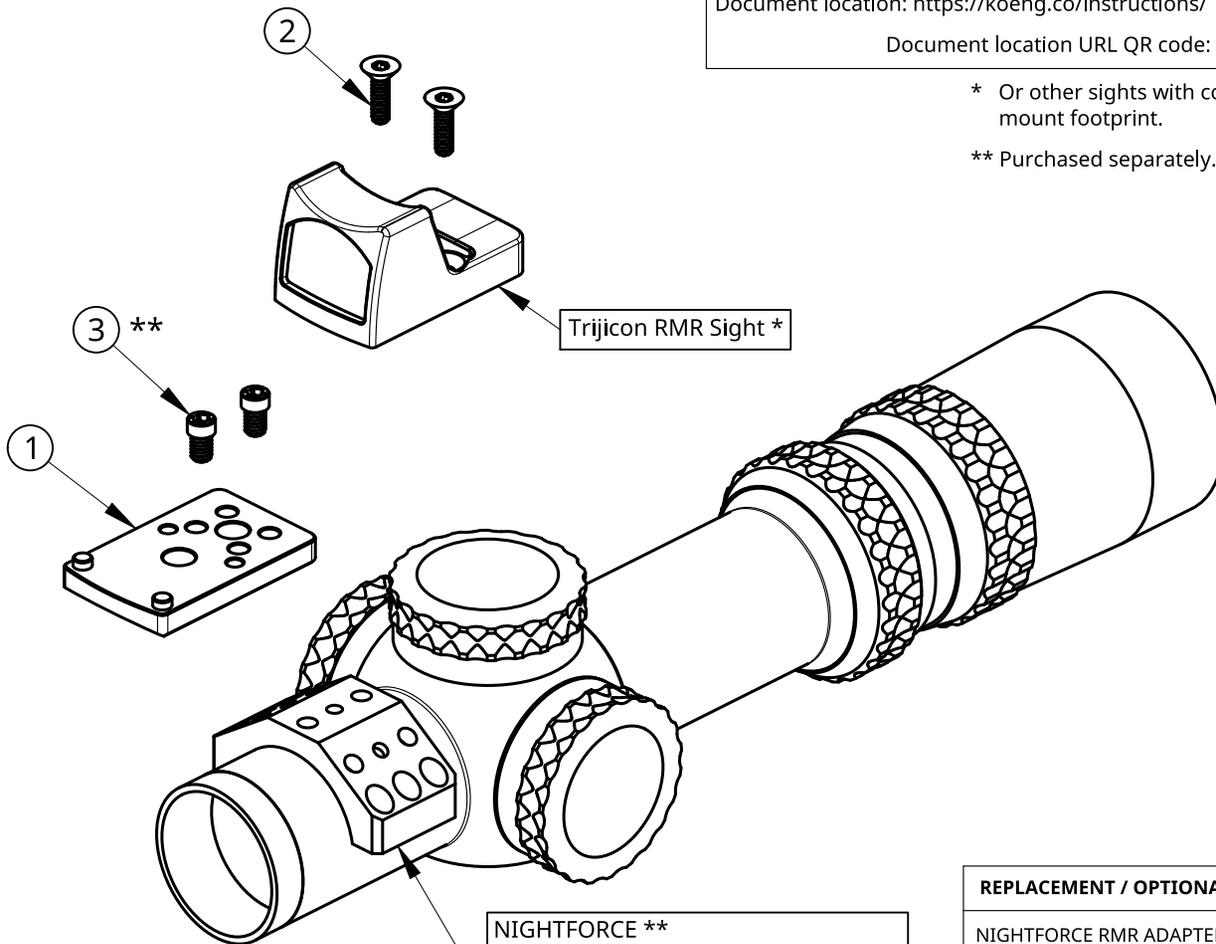

NIGHTFORCE **
 RAP-i / X-treme Duty MultiMount Ring
 - A425 (MultiMount, 30mm)
 - A426 (MultiMount, 34mm)
 - A687 / A689 (RAP-i, 30mm, BLK / DE)
 - A686 / A688 (RAP-i, 34mm, BLK / DE)

REPLACEMENT / OPTIONAL PARTS

NIGHTFORCE RMR ADAPTER
PN 01-075 REV02



ADAPTER MOUNT SCREWS
PN 10-009





RMR MOUNT SCREWS
PN 10-012



AR15 / M4 HEIGHT OVER BORES

w/ 1.54" SCOPE MOUNT
 ATACR 1-8X: 2.74"
 RMR: 4.45"

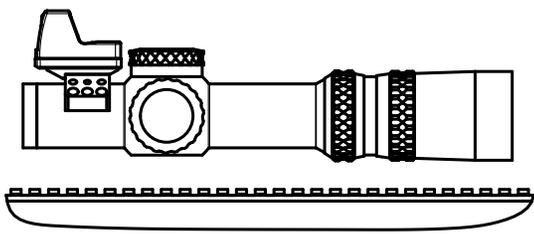

2

1

B

A

A

NAME		DATE					
DRAWN		2025/07/25					
CHECKED				TITLE			
APPROVED				TRIJICON RMR Nightforce Adapter PN 01-075 REV02			
MATERIAL		FINISH		SIZE	DWG NO.	REV.	
7075-T6		MIL-SPEC TYPE 3 BLACK HARDCOAT		A	20250725	A	
SCALE		WEIGHT		SHEET			
1:1.5		0.74oz / 21g		1 of 1			