

2

1

PART LIST

ITEM	QTY	DESCRIPTION
(1)	1	ACCESSORY TOP RING PN 01-035

This document fits an 8.5 x 11 US Letter sheet.
 Document directory: <https://koeng.co/instructions/>
 Document directory URL QR code:



** Reuse ones included with your Leupold scope mount / ring.



Tools Needed

- Torque driver / wrench (e.g., 10 - 50 in-lbs).
- T15 Torx bit for installing the accessory top ring.


Install Your Accessory Top Ring

1. Remove the existing ring screws on your Leupold scope mount or ring.
2. Install your top ring in place of the original / factory top ring using the mount screws included with your Leupold scope mount or ring. Gradually tighten the screws in an 'X' pattern to 25 - 28 in-lbs. Make sure to maintain an even gap between the top ring and ring body on both sides.

Top Ring Screws **

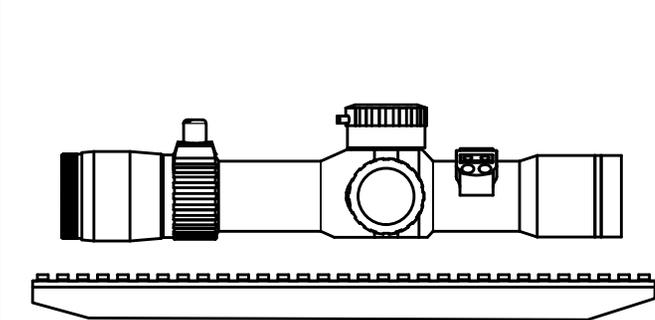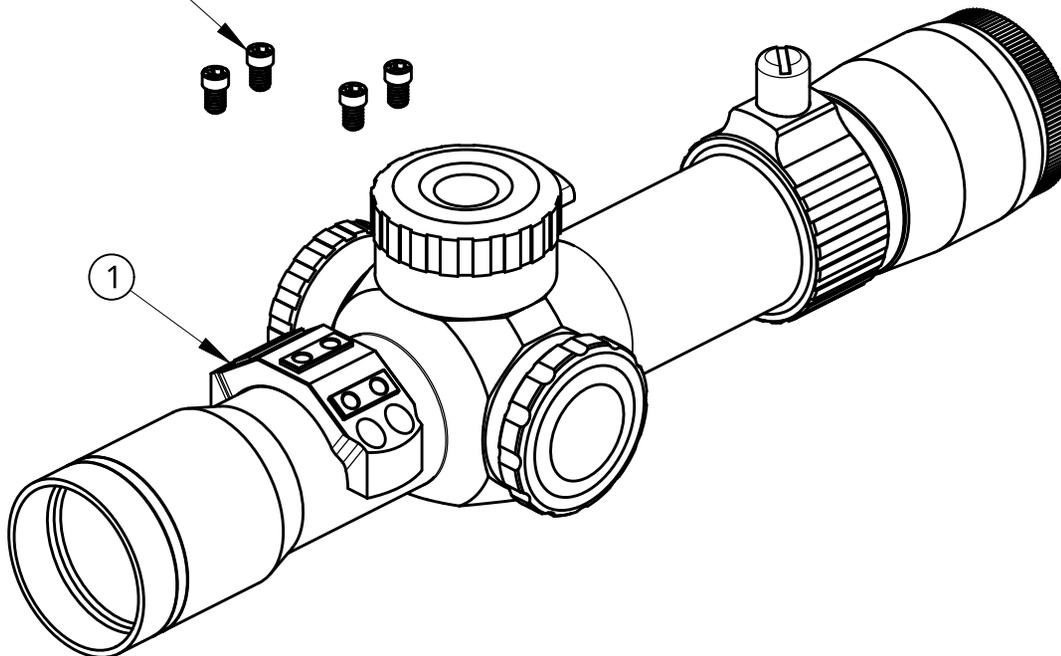

OFFSET ANGLE
35.0°

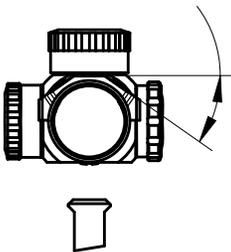

REPLACEMENT / OPTIONAL PARTS

ACCESSORY TOP RING, LEUPOLD
PN 01-035



	NAME	DATE
DRAWN	KOENG.CO	12/15/2025
CHECKED		
APPROVED		
MATERIAL	7075-T6	FINISH Mil. Spec Type 3 Anodized



TITLE		
Accessory Top Ring, Leupold PN 01-035 30MM / 34MM / 35MM		
SIZE A	DWG NO. 20251215	REV. 01
SCALE 1:1.6	WEIGHT 0.7oz / 20g	SHEET 1 of 1

2

1

B

B

A

A