

PARTS LIST

ITEM	QTY	DESCRIPTION
(1)	1	HOLOSUN HE509T PLATE PN 01-016
(2)	2	#8-40, .28 SCREW REUSE SCREWS INCLUDED WITH YOUR MULTIMOUNT / RAP-i KIT **


This document fits an 8.5 x 11 US Letter sheet.
Document directory: <https://koeng.co/instructions/>

Document directory URL QR code:



* Or other compatible sights with same mounting interface.

** Purchased separately.

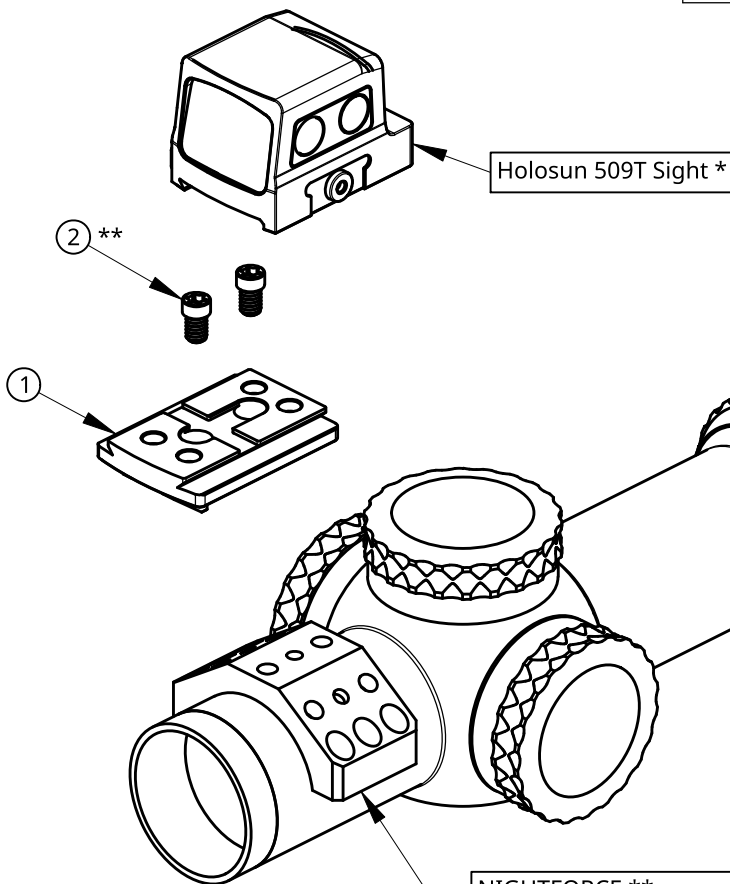

Tools Needed

- Torque driver / wrench (e.g., 10 - 50 in-lbs).
- T10 Torx bit for installing Holosun HE509T.
- T15 Torx bit for installing the adapter plate.

1. Install Adapter Plate


- Affix adapter plate (1) to Nightforce RAP-i / X-treme Duty MultiMount ring using screws (2). Torque to 25 in-lbs.

2. Install Holosun HE509T Sight

- With the HE509T recoil stop positioned in the recess, push the sight forward and tighten the locking bar screw.
- Tighten the locking bar screw until light resistance is encountered.
Proceed with another 1/4 - 1/2 turn until fully tightened (torque to <=26 in-lbs).
- Retighten the locking bar screw after initial firing to ensure the sight is securely fastened.

AR15 / M4 HEIGHT OVER BORES

w/ 1.54" SCOPE MOUNT
 ATACR 1-8X: 2.74"
 509T: 4.55"

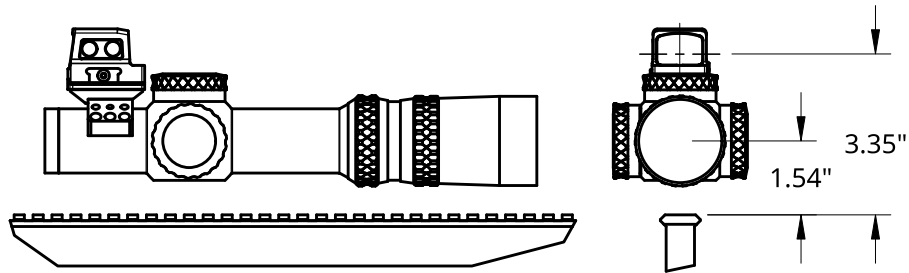

NIGHTFORCE **
 RAP-i / X-treme Duty MultiMount Ring
 - A425 (30mm MultiMount)
 - A426 (34mm MultiMount)
 - A687 / A689 (RAP-i, 30mm, BLK / DE)
 - A686 / A688 (RAP-i, 34mm, BLK / DE)

REPLACEMENT / OPTIONAL PARTS

509T NIGHTFORCE ADAPTER
 PN 01-016



ADAPTER MOUNT SCREWS
 PN 10-009



DRAWN		NAME	DATE				
CHECKED		KOENG.CO	03/25/2024	TITLE			
APPROVED				HOLOSUN 509T Nightforce Adapter PN 01-016			
MATERIAL		FINISH		SIZE	DWG NO.	REV.	
6061-T6		Mil. Spec Type 3 Anodized		A	20240325	01	
SCALE		WEIGHT		SHEET			
1:1.5		0.68 oz / 19.3 g		1 of 1			