

PARTS LIST		
ITEM	QTY	DESCRIPTION
(1)	1	AIMPOINT ACRO PLATE PN 01-009 REV02
(2)	2	#8-40, .28 SCREW REUSE ONES INCLUDED WITH YOUR MULTIMOUNT / RAP-I KIT **

Tools Needed

- Torque driver / wrench (e.g., 10 - 50 in-lbs).
- T10 Torx bit for installing Aimpoint ACRO.
- T15 Torx bit for installing the adapter plate.

1. Install Adapter Plate

- Affix adapter plate (1) to Nightforce RAP-i / X-treme Duty MultiMount top ring using screws (2). + Torque to 25 in-lbs.




2. Install Aimpoint ACRO Sight

- With the ACRO recoil stop positioned in the recess, push the sight forward and tighten the locking bar screw.
- Tighten the locking bar screw until light resistance is encountered.
Proceed with another $\frac{1}{4}$ - $\frac{1}{2}$ turn until fully tightened (torque to ≤ 26 in-lbs).
- Retighten the locking bar screw after initial firing to ensure the sight is securely fastened.

+ The adapter's MultiMount interface is machined to have a tight fit to help alleviate impact force from the mount screws and to enhance zero retention.

AR15 / M4 HEIGHT OVER BORES

w/ 1.54" SCOPE MOUNT
 ATACR 1-8X: 2.74"
 ACRO: 4.45"

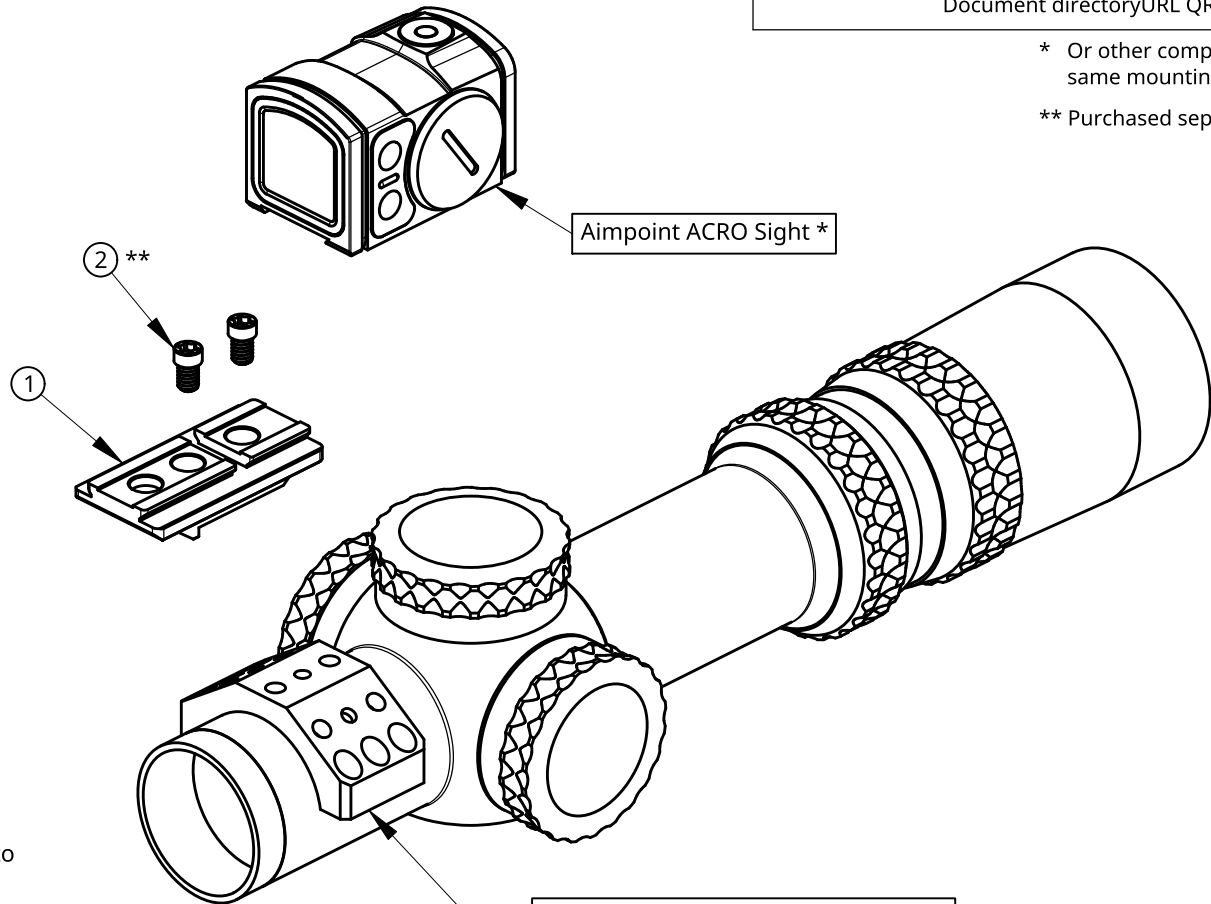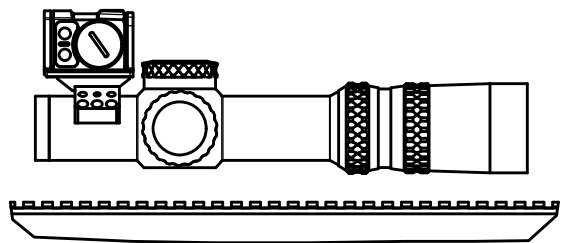

NIGHTFORCE **	
RAP-i / X-treme Duty MultiMount Ring	
- A425	(30mm MultiMount)
- A426	(34mm MultiMount)
- A687 / A689	(RAP-i, 30mm, BLK / DE)
- A686 / A688	(RAP-i, 34mm, BLK / DE)

REPLACEMENT / OPTIONAL PARTS	
ACRO NIGHTFORCE ADAPTER PN 01-009 REV02	
ADAPTER MOUNT SCREWS PN 10-009	

NAME		DATE				
DRAWN	KOENG.CO	2026/10/01	TITLE Aimpoint ACRO Nightforce Adapter PN 01-009 REV02			
CHECKED						
APPROVED						
MATERIAL		FINISH	SIZE	DWG NO.	REV.	
7075-T6		Mil. Spec Type 3 Anodized	A	20261001	02	
SCALE		1:1.5	WEIGHT	0.65 oz / 18.4 g	SHEET	1 of 1

This document fits an 8.5 x 11 US Letter sheet.
 Document directory: <https://koeng.co/instructions/>

Document directoryURL QR code:



* Or other compatible sights with same mounting interface.

** Purchased separately.